

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS


**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

10/031731

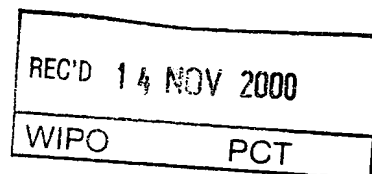

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.

The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

4500/19646

Den Haag, den  
The Hague,  
La Haye, le

08. 08. 2000

4

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts  
Im Auftrag  
For the President of the European Patent Office  
Le Président de l'Office européen des brevets  
p. o.

  
G. van Amstel

Patentanmeldung Nr.  
Patent application no.  
Demande de brevet n°

PCT/EP 00/06794

Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation



Anmeldung Nr.:  
Application no.: PCT/EP 00/06794  
Demande n°:

Anmelder:  
Applicant(s): 1. The University of Cincinnati - Cincinnati, USA  
Demandeur(s): 2. VAN OOIJ, Wim J. - Fairfield, USA  
3. YUAN, Wei - Northbrook, USA

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention: Mixed silane coatings

Anmeldetag:  
Date of filing:  
Date de dépôt: 17 July 2000 (17.07.00)

In Anspruch genommene Priorität(en)  
Priority(ies) claimed  
Priorité(s) revendiquée(s)

Staat:  
State: US  
Pays:

Tag:  
Date: 19 July 1999  
Date: (19.07.99)

Aktenzeichen: 09/356,926  
File no.  
Numéro de dépôt:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt)  
Designation of contracting states : See Form PCT/RO/101 (enclosed)  
Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

Bemerkungen:  
Remarks:  
Remarques:

**Box No.V DESIGNATION OF STATES**

The following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

**Regional Patent**

- ☒ **AP ARIPO Patent:** GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, MZ Mozambique, SD Sudan, SL Sierra Leone, SZ Swaziland, TZ United Republic of Tanzania, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT
- ☒ **EA Eurasian Patent:** AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ **EP European Patent:** AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ **OA OAPI Patent:** BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, GW Guinea-Bissau, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line) .....

**National Patent** (if other kind of protection or treatment desired, specify on dotted line):

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> AE United Arab Emirates                        | <input checked="" type="checkbox"/> LC Saint Lucia                                     |
| <input checked="" type="checkbox"/> AG Antigua and Barbuda                         | <input checked="" type="checkbox"/> LK Sri Lanka                                       |
| <input checked="" type="checkbox"/> AL Albania .....                               | <input checked="" type="checkbox"/> LR Liberia   |
| <input checked="" type="checkbox"/> AM Armenia .....                               | <input checked="" type="checkbox"/> LS Lesotho .....                                   |
| <input checked="" type="checkbox"/> AT Austria .....                               | <input checked="" type="checkbox"/> LT Lithuania                                       |
| <input checked="" type="checkbox"/> AU Australia .....                             | <input checked="" type="checkbox"/> LU Luxembourg                                      |
| <input checked="" type="checkbox"/> AZ Azerbaijan                                  | <input checked="" type="checkbox"/> LV Latvia  |
| <input checked="" type="checkbox"/> BA Bosnia & Herzegovina .....                  | <input checked="" type="checkbox"/> MA Morocco .....                                   |
| <input checked="" type="checkbox"/> BB Barbados                                    | <input checked="" type="checkbox"/> MD Republic of Moldova .....                       |
| <input checked="" type="checkbox"/> BG Bulgaria .....                              | <input checked="" type="checkbox"/> MG Madagascar .....                                |
| <input checked="" type="checkbox"/> BR Brazil .....                                | <input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia ..... |
| <input checked="" type="checkbox"/> BY Belarus .....                               | <input checked="" type="checkbox"/> MN Mongolia  |
| <input checked="" type="checkbox"/> BZ Belize                                      | <input checked="" type="checkbox"/> MW Malawi .....                                    |
| <input checked="" type="checkbox"/> CA Canada                                      | <input checked="" type="checkbox"/> MX Mexico .....                                    |
| <input checked="" type="checkbox"/> CH and LI Switzerland and Liechtenstein        | <input checked="" type="checkbox"/> MZ Mozambique                                      |
| <input checked="" type="checkbox"/> CN China .....                                 | <input checked="" type="checkbox"/> NO Norway  |
| <input checked="" type="checkbox"/> CR Costa Rica .....                            | <input checked="" type="checkbox"/> NZ New Zealand .....                               |
| <input checked="" type="checkbox"/> CU Cuba .....                                  | <input checked="" type="checkbox"/> PL Poland .....                                    |
| <input checked="" type="checkbox"/> CZ Czech Republic .....                        | <input checked="" type="checkbox"/> PT Portugal .....                                  |
| <input checked="" type="checkbox"/> DE Germany .....                               | <input checked="" type="checkbox"/> RO Romania   |
| <input checked="" type="checkbox"/> DK Denmark .....                               | <input checked="" type="checkbox"/> RU Russian Federation .....                        |
| <input checked="" type="checkbox"/> DM Dominica                                    | <input checked="" type="checkbox"/> SD Sudan   |
| <input checked="" type="checkbox"/> DZ Algeria .....                               | <input checked="" type="checkbox"/> SE Sweden  |
| <input checked="" type="checkbox"/> EE Estonia .....                               | <input checked="" type="checkbox"/> SG Singapore                                       |
| <input checked="" type="checkbox"/> ES Spain .....                                 | <input checked="" type="checkbox"/> SI Slovenia .....                                  |
| <input checked="" type="checkbox"/> FI Finland .....                               | <input checked="" type="checkbox"/> SK Slovakia .....                                  |
| <input checked="" type="checkbox"/> GB United Kingdom                              | <input checked="" type="checkbox"/> SL Sierra Leone .....                              |
| <input checked="" type="checkbox"/> GD Grenada                                     | <input checked="" type="checkbox"/> TJ Tajikistan .....                                |
| <input checked="" type="checkbox"/> GE Georgia .....                               | <input checked="" type="checkbox"/> TM Turkmenistan .....                              |
| <input checked="" type="checkbox"/> GH Ghana .....                                 | <input checked="" type="checkbox"/> TR Turkey .....                                    |
| <input checked="" type="checkbox"/> GM Gambia                                      | <input checked="" type="checkbox"/> TT Trinidad and Tobago .....                       |
| <input checked="" type="checkbox"/> HR Croatia .....                               | <input checked="" type="checkbox"/> TZ United Republic of Tanzania                     |
| <input checked="" type="checkbox"/> HU Hungary .....                               | <input checked="" type="checkbox"/> UA Ukraine .....                                   |
| <input checked="" type="checkbox"/> ID Indonesia                                   | <input checked="" type="checkbox"/> UG Uganda .....                                    |
| <input checked="" type="checkbox"/> IL Israel .....                                | <input checked="" type="checkbox"/> US United States of America .....                  |
| <input checked="" type="checkbox"/> IN India .....                                 | <input checked="" type="checkbox"/> UZ Uzbekistan .....                                |
| <input checked="" type="checkbox"/> IS Iceland                                     | <input checked="" type="checkbox"/> VN Viet Nam .....                                  |
| <input checked="" type="checkbox"/> JP Japan .....                                 | <input checked="" type="checkbox"/> YU Yugoslavia .....                                |
| <input checked="" type="checkbox"/> KE Kenya .....                                 | <input checked="" type="checkbox"/> ZA South Africa .....                              |
| <input checked="" type="checkbox"/> KG Kyrgyzstan .....                            | <input checked="" type="checkbox"/> ZW Zimbabwe .....                                  |
| <input checked="" type="checkbox"/> KP Democratic People's Republic of Korea ..... |  |
| <input checked="" type="checkbox"/> KR Republic of Korea .....                     |  |
| <input checked="" type="checkbox"/> KZ Kazakhstan .....                            |  |

Check-boxes reserved for designating States which have become party to the PCT after issuance of this sheet:

- ☐ .....
- ☐ .....

**Precautionary Designation Statement:** In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation (including fees) must reach the receiving Office within the 15-month time limit.)

## MIXED SILANE COATINGS

### BACKGROUND OF THE INVENTION

#### Field of the Invention

The present invention relates to silane coatings for metals. More particularly, the present invention provides coatings which include a vinyl silane and a bis-silyl aminosilane, and are particularly useful for preventing corrosion. Solutions for applying such coatings, as well as methods of treating metal surfaces, are also provided.

#### Description of Related Art

Most metals are susceptible to corrosion, including the formation of various types of rust. Such corrosion will significantly affect the quality of such metals, as well as that of the products produced therefrom. Although rust and the like may often be removed, such steps are costly and may further diminish the strength of the metal. In addition, when polymer coatings such as paints, adhesives or rubbers are applied to the metals, corrosion may cause a loss of adhesion between the polymer coating and the metal.

By way of example, metallic coated steel sheet such as galvanized steel is used in many industries, including the automotive, construction and appliance industries. In most cases, the galvanized steel is painted or otherwise coated with a polymer layer to achieve a durable and aesthetically-pleasing product. Galvanized steel, particularly hot-dipped galvanized steel, however, often develops "white rust" during storage and shipment.

White rust (also called "wet-storage stain") is typically caused by moisture condensation on the surface of galvanized steel which reacts with the zinc coating. On products such as GALVALUME®, the wet-storage stain is black in color ("black rust"). White rust (as well as black rust) is aesthetically unappealing and impairs the ability of the galvanized steel to be painted or otherwise coated with a polymer. Thus, prior to such coating, the surface of the galvanized steel must be pretreated in order to remove the white rust and prevent its reformation beneath the polymer layer. Various methods are

currently employed to not only prevent the formation of white rust during shipment and storage, but also to prevent the formation of white rust beneath a polymer coating (e.g., paint).

5 In order to prevent white rust on hot-dipped galvanized steel during storage and shipping, the surface of the steel is often passivated by forming a thin chromate film on the surface of the steel. While such chromate coatings do provide resistance to the formation of white rust, chromium is highly toxic and environmentally undesirable. It is also known to employ a phosphate conversion coating in conjunction with a chromate rinse in order to improve paint adherence and provide corrosion protection. It is believed that the chromate rinse covers the pores in the phosphate coating, thereby improving the corrosion resistance and adhesion performance. Once again, however, it is highly desirable to eliminate the use of chromate altogether. Unfortunately, however, the phosphate conversion coating is generally not very effective without the chromate rinse.

15 Recently, various techniques for eliminating the use of chromate have been proposed. These include coating the galvanized steel with an inorganic silicate followed by treating the silicate coating with an organofunctional silane (U.S. Patent No. 5,108,793). U.S. Patent No. 5,292,549 teaches the rinsing of metallic coated steel sheet with a solution containing an organic silane and a crosslinking agent. Various other techniques for preventing the formation of white rust on galvanized steel, as well as preventing corrosion on other types of metals, have also been proposed. Many of these proposed techniques, however, are ineffective, or require time-consuming, energy-inefficient, multi-step processes. Thus, there is a need for a simple, low-cost technique for preventing corrosion on the surface of metal.

## SUMMARY OF THE INVENTION

30 It is an object of the present invention to provide a treatment method for metal surfaces, especially to prevent corrosion.

It is also an object of the present invention to provide a treatment method

for metal surfaces to improve adhesion.


It is another object of the present invention to provide a treatment solution useful in preventing corrosion of metal surfaces, for example steel, aluminium, aluminium alloys, zinc, zinc alloys, magnesium, magnesium alloys, copper, copper alloys, tin and tin alloys, particularly zinc, zinc alloys, and other metals having a zinc-containing coating thereon.

It is yet another object of the present invention to provide a metal surface having improved corrosion resistance.

The foregoing objects can be accomplished, in accordance with one aspect of the present invention, by a method of treating a metal surface, comprising the steps of:

- (a) providing a metal surface; and
- (b) applying a silane solution to said metal surface, said silane solution having at least one vinyl silane and at least one bis-silyl aminosilane, wherein said at least one vinyl silane and said at least one bis-silyl aminosilane have been at least partially hydrolyzed.

The vinyl silane(s) may have a trisubstituted silyl group, wherein the substituents are individually selected from the group consisting of hydroxy, alkoxy, aryloxy and acyloxy. Preferably, the vinyl silane comprises:

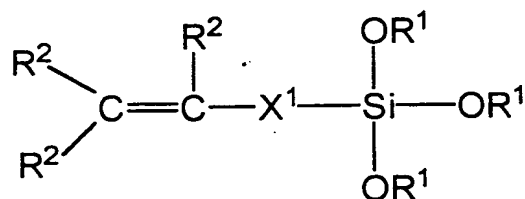

wherein:

-each R<sup>1</sup> is individually selected from the group consisting of: hydrogen, C<sub>1</sub> - C<sub>24</sub> alkyl and C<sub>2</sub> - C<sub>24</sub> acyl;


-X<sup>1</sup> is selected from the group consisting of: a C-Si bond, substituted aliphatic groups, unsubstituted aliphatic groups, substituted aromatic groups, and



unsubstituted aromatic groups; and

-each  $R^2$  is individually selected from the group consisting of: hydrogen,  $C_1 - C_6$  alkyl,  $C_1 - C_6$  alkyl substituted with at least one amino group,  $C_1 - C_6$  alkenyl,  $C_1 - C_6$  alkenyl substituted with at least one amino group, arylene, and alkylarylene.

The bis-silyl aminosilane(s) may comprise an aminosilane having two trisubstituted silyl groups, wherein the substituents are individually selected from the group consisting of hydroxy, alkoxy, aryloxy and acyloxy. Preferably, the bis-silyl aminosilane comprises:

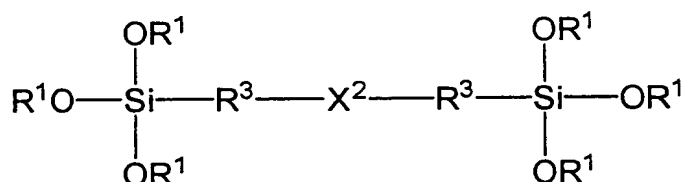


wherein:

-each  $R^1$  is individually selected from the group consisting of: hydrogen,  $C_1 - C_{24}$  alkyl and  $C_2 - C_{24}$  acyl;

-each  $R^3$  is individually selected from the group consisting of: substituted aliphatic groups, unsubstituted aliphatic groups, substituted aromatic groups, and unsubstituted aromatic groups; and

- $X^2$  is either:



-wherein each  $R^4$  is individually selected from the group consisting of: hydrogen, substituted and unsubstituted aliphatic groups, and substituted and unsubstituted aromatic groups; and

- $R^5$  is selected from the group consisting of: substituted and unsubstituted aliphatic groups, and substituted and unsubstituted aromatic groups.

The present invention also provides a solution (preferably aqueous) comprising at least one vinyl silane and at least one bis-silyl aminosilane, wherein the at least one vinyl silane and the at least one bis-silyl aminosilane are at least partially hydrolyzed. A metal surface having improved corrosion resistance is also provided.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Applicants have previously found that the corrosion of metal, particularly galvanized steel, can be prevented by applying a treatment solution containing one or more hydrolyzed vinyl silanes to the metal (see U.S. Patent No. 5,759,629, which is incorporated herein by way of reference). While the corrosion protection provided by the resulting vinyl silane coating was surprisingly superior to conventional chromate-based treatments, and avoided the chromium disposal problem, the vinyl silane solutions of U.S. Patent No. 5,759,629 have limited storage stability. In addition, while the methods disclosed in this patent provide excellent corrosion prevention when tested in a humidity chamber at 60° C and 85% relative humidity ("RH"), the corrosion prevention benefits are reduced in a humidity chamber at 40° C and 100% RH. Applicants have now found that the addition of one or more bis-silyl aminosilanes to a vinyl silane solution not only significantly improves storage stability of the solution, but also significantly improves the corrosion protection provided by the solution (particularly in tests performed at 40° C and 100% RH).

The solutions and methods of the present invention may be used on a variety of metals, including steel, aluminium, aluminium alloys, zinc, zinc alloys, magnesium, magnesium alloys, copper, copper alloys, tin and tin alloys. In particular, the present method is particularly useful on zinc, zinc alloy, and metals having a zinc-containing coating thereon. For example, the treatment solutions and methods of the present invention are useful in preventing corrosion of steel having a zinc-containing coating, such as: galvanized steel (especially hot dipped galvanized steel), GALVALUME® (a 55%-Al/43.4%-Zn/1.6% - Si alloy coated sheet steel manufactured and sold, for example, by


Bethlehem Steel Corp), GALFAN® (a 5%-Al/95%-Zn alloy coated sheet steel manufactured and sold by Weirton Steel Corp., of Weirton, WV), galvanneal (annealed hot dipped galvanized steel) and similar types of coated steel. Zinc and zinc alloys are also particularly amenable to application of the treatment solutions and methods of the present invention. Exemplary zinc and zinc alloy materials include: titanium-zinc (zinc which has a very small amount of titanium added thereto), zinc-nickel alloy (typically about 5% to about 13% nickel content), and zinc-cobalt alloy (typically about 1% cobalt).

The solutions of the present invention may be applied to the metal prior to shipment to the end-user, and provide corrosion protection during shipment and storage (including the prevention of wet-storage stain such as white rust). If a paint or other polymer coating is desired, the end user may merely apply the paint or polymer (e.g., such as adhesives, plastics, or rubber coatings) directly on top of the silane coating provided by the present invention. The silane coatings of the present invention not only provide excellent corrosion protection even without paint, but also provide superior adhesion of paint, rubber or other polymer layers. Thus, unlike many of the currently-employed treatment techniques, the silane coatings of the present invention need not be removed prior to painting (or applying other types of polymer coatings such as rubber).

The solutions of the present invention comprise a mixture of one or more vinyl silanes and one or more bis-silyl aminosilanes, and do not require the use or addition of silicates. The silanes in the treatment solution should be at least partially hydrolyzed, and are preferably substantially fully hydrolyzed. The solution is preferably aqueous, and may optionally include one or more compatible solvents (such as ethanol, methanol, propanol or isopropanol), as needed. The application pH of the silane mixture is generally not critical. The term "application pH" refers to the pH of the silane solution when it is applied to the metal surface, and may be the same as or different from the pH during solution preparation. Although not critical, an application pH of between about 4 and about 10 is preferred, and the pH may be adjusted by the addition of one or more acids, preferably organic acids such as acetic, formic, propionic or iso-

propionic. Sodium hydroxide (or other compatible base) may be used, if needed, to raise the pH of the treatment solution.

The preferred vinyl silanes which may be employed in the present invention each have a single trisubstituted silyl group, wherein the substituents are individually selected from the group consisting of hydroxy, alkoxy, aryloxy and acyloxy. Thus, these vinyl silanes have the general formula:

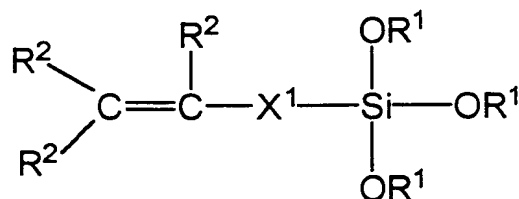

wherein each  $\text{R}^1$  is selected from the group consisting of: hydrogen,  $\text{C}_1 - \text{C}_{24}$  alkyl (preferably  $\text{C}_1 - \text{C}_6$  alkyl), and  $\text{C}_2 - \text{C}_{24}$  acyl (preferably  $\text{C}_2 - \text{C}_4$  acyl). Each  $\text{R}^1$  may be the same or different, however the vinyl silane(s) is hydrolyzed in the treatment solution such that at least a portion (and preferably all or substantially all) of the non-hydrogen  $\text{R}^1$  groups are replaced by a hydrogen atom. Preferably, each  $\text{R}^1$  is individually selected from the group consisting of: hydrogen, ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl.


$\text{X}^1$  may be a bond (specifically, a C-Si bond), a substituted or unsubstituted aliphatic group, or a substituted or unsubstituted aromatic group. Preferably,  $\text{X}^1$  is selected from the group consisting of: a bond,  $\text{C}_1 - \text{C}_6$  alkylene,  $\text{C}_1 - \text{C}_6$  alkenylene,  $\text{C}_1 - \text{C}_6$  alkylene substituted with at least one amino group,  $\text{C}_1 - \text{C}_6$  alkenylene substituted with at least one amino group, arylene, and alkylarylene. More preferably,  $\text{X}^1$  is selected from the group consisting of: a bond, and  $\text{C}_1 - \text{C}_6$  alkylene.

Each  $\text{R}^2$  is individually selected from the group consisting of: hydrogen,  $\text{C}_1 - \text{C}_6$  alkyl,  $\text{C}_1 - \text{C}_6$  alkyl substituted with at least one amino group,  $\text{C}_1 - \text{C}_6$  alkenyl,  $\text{C}_1 - \text{C}_6$  alkenyl substituted with at least one amino group, arylene, and

alkylarylene. Each  $R^2$  may be the same or different. Preferably, each  $R^2$  is individually selected from the group consisting of: hydrogen, ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl.

Particularly preferred vinyl silane(s) used to prepare the treatment solution include those having the above structure, wherein each  $R^2$  is a hydrogen,  $X^1$  is an alkylene (especially  $C_1 - C_{10}$  alkylene), and each  $R^1$  is as described above. Exemplary vinyl silanes include: vinyltrimethoxysilane, vinyltriethoxysilane, vinyltripropoxysilane, vinyltriisopropoxysilane, vinyltributoxysilane, vinyltriisobutoxysilane, vinylacetoxysilane, vinyltriisobutoxysilane, vinylbutyltrimethoxysilane, vinylmethyltrimethoxysilane, vinyllethyltrimethoxysilane, vinylpropyltrimethoxysilane, vinylbutyltriethoxysilane, and vinylpropyltriethoxysilane. Vinyltrimethoxysilane, vinyltriethoxysilane and vinyltriacetoxysilane are most preferred.

The preferred bis-silyl aminosilanes which may be employed in the present invention have two trisubstituted silyl groups, wherein the substituents are individually selected from the group consisting of hydroxy, alkoxy, aryloxy and acyloxy. Thus, these bis-silyl aminosilanes have the general structure:

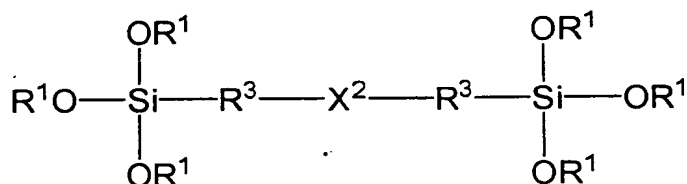


wherein each  $R^1$  is as described previously. Once again the aminosilane(s) is hydrolyzed in the treatment solution such that at least a portion (and preferably all or substantially all) of the non-hydrogen  $R^1$  groups are replaced by a hydrogen atom.

Each  $R^3$  in the aminosilane(s) may be a substituted or unsubstituted aliphatic group, or a substituted or unsubstituted aromatic group, and each  $R^3$

may be the same or different. Preferably, each  $R^3$  is selected from the group consisting of:  $C_1 - C_{10}$  alkylene,  $C_1 - C_{10}$  alkenylene, arylene, and alkylarylene. More preferably, each  $R^3$  is a  $C_1 - C_{10}$  alkylene (particularly propylene).

5  $X^2$  may be:




10 wherein each  $R^4$  may be a hydrogen, a substituted or unsubstituted aliphatic group, or a substituted or unsubstituted aromatic group, and each  $R^4$  may be the same or different. Preferably, each  $R^4$  is selected from the group consisting of hydrogen,  $C_1 - C_6$  alkyl and  $C_1 - C_6$  alkenyl. More preferably, each  $R^4$  is a hydrogen atom.

15 Finally,  $R^5$  in the aminosilane(s) may be a substituted or unsubstituted aliphatic group or a substituted or unsubstituted aromatic group. Preferably,  $R^5$  is selected from the group consisting of:  $C_1 - C_{10}$  alkylene,  $C_1 - C_{10}$  alkenylene, arylene, and alkylarylene. More preferably,  $R^5$  is a  $C_1 - C_{10}$  alkylene (particularly ethylene).

20 Particularly preferred bis-silyl aminosilanes which may be used in the present invention include:


*bis*-(trimethoxysilylpropyl)amine (which is sold under the tradename A-1170 by Witco):

25




30

*bis*-(triethoxysilylpropyl)amine:



5

and bis-(triethoxysilylpropyl)ethylene diamine:



10

Particularly preferred combinations of vinyl silanes and bis-silyl aminosilanes are:

vinyltriacetoxysilane and bis-(trimethoxysilylpropyl)amine;

15 vinyltriacetoxysilane and bis-(triethoxysilylpropyl)amine;

vinyltrimethoxysilane and bis-(triethoxysilylpropyl)amine;

vinyltriethoxysilane and bis-(triethoxysilylpropyl)amine

vinyltrimethoxysilane and bis-(trimethoxysilylpropyl)amine; and

vinyltriethoxysilane and bis-(trimethoxysilylpropyl)amine.

20

As mentioned above, the vinyl silane(s) and aminosilane(s) in the solution of the present invention are at least partially, and preferably are substantially fully hydrolyzed in order to facilitate the bonding of the silanes to the metal surface and to each other. During hydrolysis, the  $-\text{OR}^1$  groups are replaced by hydroxyl groups. Hydrolysis of the silanes may be accomplished, for example,

25 by merely mixing the silanes in water, and optionally including a solvent (such as an alcohol) in order to improve silane solubility and solution stability. Alternatively, the silanes may first be dissolved in a solvent, and water then added to accomplish hydrolysis. In order to accelerate silane hydrolysis and avoid silane condensation during hydrolysis, the pH may be maintained below

30 about 7, more preferably between about 4 and about 6, and even more preferably between about 4.5 and about 5.0. As mentioned previously, however,

the pH ranges preferred during solution preparation should not be confused with the application pH. The pH may be adjusted, for example, by the addition of a compatible organic acid, as described previously. Some silanes provide an acidic pH when mixed with water alone, and for these silanes pH adjustment may not be needed to accelerate silane hydrolysis.

Where an acyloxy silane is used, for example vinyltriacetoxysilane, hydrolysis of the acyloxy silane results in the production of organic acids. For example, where vinyltriacetoxysilane is used, acetic acid is produced. This results in an acidic solution and little or no pH adjusting acids need be added. In order that the pH does not drop to levels which promote condensation reactions of the silanes, the bis-silyl aminosilane may be added. As this is a basic compound it acts to balance the pH of the solution. Alternatively, or in addition, further pH adjusting agents may be added to maintain a treatment solution pH in the preferred range.

It should be noted that the various silane concentrations discussed and claimed herein are all defined in terms of the ratio between the amount (by volume) of unhydrolyzed silane(s) employed to prepare the treatment solution (i.e., prior to hydrolyzation), and the total volume of treatment solution components (i.e., vinyl silanes, aminosilanes, water, optional solvents and optional pH adjusting agents). In the case of vinyl silane(s), the concentrations herein (unless otherwise specified) refer to the total amount of unhydrolyzed vinyl silanes employed, since multiple vinyl silanes may optionally be present. The aminosilane(s) concentrations herein are defined in the same manner.

As for the concentration of hydrolyzed silanes in the treatment solution, beneficial results will be obtained over a wide range of silane concentrations and ratios. It is preferred, however, that the solution have at least about 1% vinyl silanes by volume; more preferably at least about 3% vinyl silanes by volume. Lower vinyl silane concentrations generally provide less corrosion protection. Higher concentrations of vinyl silanes (greater than about 10%) should also be avoided for economic reasons, and to avoid silane condensation (which may limit storage stability). Also, treatment solutions containing high



concentrations of vinyl silanes may produce thick films which are too weak or brittle for some applications.

As for the concentration of bis-silyl aminosilanes in the treatment solution, once again a wide range of concentrations are suitable. It is preferred, however, that the solution have between about 0.1% and about 5% by volume, more preferably between about 0.75% and about 3%. As for the ratio of vinyl silanes to aminosilanes, a wide range of silane ratios may be employed, and the present invention is not limited to any particular range of silane ratios. It is preferred, however, that the concentration of aminosilanes is approximately the same as or less than the concentration of vinyl silanes. More preferably, the ratio of vinyl silanes to aminosilanes is at least about 1.5, even more preferably at least about 4. While lower ratios of vinyl silanes to aminosilanes provide improvements in the stability of the treatment solution, corrosion protection is reduced. Higher ratios of vinyl silanes to aminosilanes provide improved corrosion protection, while the enhancement in solution stability provided by the aminosilanes is reduced. Applicants have found, however, that even the addition of a small amount of a bis-silyl aminosilane to the treatment solutions of U.S. Patent No. 5,292,549 will unexpectedly improve the corrosion protection provided by the treatment solution. Therefore, while the addition of even a small amount of bis-silyl aminosilane may not appreciably improve solution stability, corrosion protection will nevertheless be enhanced. Thus, the silane ratio may be tailored to a specific need.

The mixture of the vinyl and amino silanes may be provided to the user in a pre-mixed, unhydrolysed form which improves shelf life as condensation of the silane is limited. Such a mixture can then be made up into a treatment solution as defined herein. Such a pre-mixed, unhydrolysed compositions should preferably be substantially free of water but may include one or more organic solvents (such as alcohols). The pre-mixed, unhydrolysed composition should preferably be presented having a preferred ratio range of vinylsilane to aminosilane, thus enabling a ready-to-use treatment solution to be made up by the addition of an appropriate solvent system, without initial manipulation of the

silane ratios. The composition may also include other components such as pH adjusting agents (acids or alkalis), stabilizers, pigments, desiccants, and the like.

Since the solubility in water of some silanes suitable for use in the present invention may be limited, the treatment solution may optionally include one or more solvents (such as an alcohol) in order to improve silane solubility. Particularly preferred solvents include: methanol, ethanol, propanol and isopropanol. When a solvent is added, the amount of solvent employed will depend upon the solubility of the particular silanes employed. Thus, the treatment solution of the present invention may contain from about 0 to about 95 parts alcohol (by volume) for every 5 parts of water. Since it is often desirable to limit, or even eliminate the use of organic solvents wherever possible, the solution more preferably is aqueous in nature, thereby having less than 5 parts organic solvent for every 5 parts of water (i.e., more water than solvent). The solutions of the present invention can even be substantially free of any organic solvents. When a solvent is used, ethanol is preferred.

The treatment method itself is very simple. The unhydrolyzed silanes, water, solvent (if desired), and a small amount of acid (if pH adjustment is desired) are combined with one another. The solution is then stirred at room temperature in order to hydrolyze the silanes. The hydrolysis may take up to several hours to complete, and its completion will be evidenced by the solution becoming clear.

In one exemplary method of preparing the treatment solution, the aminosilane(s) is first hydrolyzed in water, and acetic acid may be added as needed to adjust the pH to below about 7. After addition of the aminosilane, the treatment solution is mixed for about 24 hours to ensure complete (or substantially complete) hydrolysis. Thereafter, the vinyl silane(s) is added to the treatment solution while stirring to ensure complete (or substantially complete) hydrolysis of the vinyl silane(s).

The metal surface to be coated with the solution of the present invention may be solvent and/or alkaline cleaned by techniques well-known to those skilled in the art prior to application of the treatment solution of the present

invention. The silane solution (prepared in the manner described above) is then applied to the metal surface (i.e., the sheet is coated with the silane solution) by, for example, dipping the metal into the solution (also referred to as "rinsing"), spraying the solution onto the surface of the metal, or even brushing or wiping the solution onto the metal surface. Various other application techniques well-known to those skilled in the art may also be used. When the preferred application method of dipping is employed, the duration of dipping is not critical, as it generally does not significantly affect the resulting film thickness. It is merely preferred that whatever application method is used, the contact time should be sufficient to ensure complete coating of the metal. For most methods of application, a contact time of at least about 2 seconds, and more preferably at least about 5 seconds, will help to ensure complete coating of the metal.

After coating with the treatment solution of the present invention, the metal sheet may be air-dried at room temperature, or, more preferably, placed into an oven for heat drying. Preferable heated drying conditions include temperatures between about 20°C and about 200 °C with drying times of between about 30 seconds and about 60 minutes (higher temperatures allow for shorter drying times). More preferably, heated drying is performed at a temperature of at least about 90°C, for a time sufficient to allow the silane coating to dry. While heated drying is not necessary to achieve satisfactory results, it will reduce the drying time thereby lessening the likelihood of the formation of white rust during drying. Once dried, the treated metal may be shipped to an end-user, or stored for later use.

The coatings of the present invention provide significant corrosion resistance during both shipping and storage. It is believed that the vinyl silane(s) and aminosilane(s) form a dense, crosslinked polymer coating on the metal, and that the aminosilane(s) crosslinks not only itself but also the vinyl silane(s). The result is a coating comprising the vinyl silane(s) and the aminosilane(s) which provides the desired corrosion resistance. In addition, and just as significant, this coating need not be removed prior to painting or the application of other polymer coatings. For example, the end-user, such as an

automotive manufacturer, may apply paint directly on top of the silane coating without additional treatment (such as the application of chromates). The silane coating of the present invention not only provides a surprisingly high degree of paint adhesion, but also prevents delamination and underpaint corrosion even if a portion of the base metal is exposed to the atmosphere. The coated surface of the metal, however, should be cleaned prior to application of paint or other polymer coating. Suitable polymer coatings include various types of paints, adhesives (such as epoxy automotive adhesives), and peroxide-cured rubbers (e.g., peroxide-cured natural, NBR, SBR, nitrile or silicone rubbers). Suitable paints include polyesters, polyurethanes and epoxy-based paints. Plastic coatings are also suitable including acrylic, polyester, polyurethane, polyethylene, polyimide, polyphenylene oxide, polycarbonate, polyamide, epoxy, phenolic, acrylonitrile-butadiene-styrene, and acetal plastics. Thus, not only do the coatings of the present invention prevent corrosion, they may also be employed as primers and/or adhesive coatings for other polymer layers.

The examples below demonstrate some of the superior and unexpected results obtained by employing the methods of the present invention.

## EXAMPLES

The various silane solutions described in the table below were prepared by mixing the indicated silanes with water, solvent (where indicated), and acetic acid (if needed to provide the indicated pH during solution preparation). Panels of hot-dipped galvanized steel ("HDG") were then solvent-cleaned, alkaline-cleaned, water rinsed, dipped into the treatment solution for approximately 1 minute, and then air-dried at 120°C for about 5 minutes.

In order to simulate the conditions experienced by HDG during storage and shipment, the treated HDG panels were then subjected to a "stack test" and a "salt spray test." In the stack test, three coated panels were wetted with water, clamped to one another in a stack, and then placed in a humidity chamber at 100°F and 100%RH. Interfacing surfaces of the panels (i.e., surfaces which contacted another panel) were monitored each day for the presence of white

rust, and were rewet with water each day. The salt spray test comprised ASTM-B117. The following results were observed (including results for untreated (alkaline-cleaned only) panels and panels treated with a standard phosphate conversion coating and chromate rinse:

Example	Silane(s)	Solvent (in addition to water)	pH of treatment solution	White rust coverage after 14 day stack test	White rust coverage after 24 hour salt spray test
Comparative 1	Untreated	—	—	>10%	>10%
Comparative 2	Chromated	—	—	<10%	<10%
Comparative 3	5% VS	None	4	>10%	>10%
Comparative 4	5% MS	None	4	>10%	>10%
Comparative 5	5% BTSE	30% Ethanol	6	>10%	>10%
Comparative 6	3% A-1170	None	6	>10%	>10%
Comparative 7	4% BTSE + 2% VS	24% Ethanol	3	>10%	>10%
Comparative 8	2% BTSE + 3% MS	12% Ethanol	6	>10%	>10%
1	3% VS + 2% A-1170 (1.5:1)	None	4.5-5.0	35.0	<10%
2	4% VS + 2% A-1170 (2:1)	None	4.5-5.0	25.0	<10%
3	3.7% VS + 1.2% A-1170 (3:1)	None	4.5-5.0	13.5	<10%
4	4% VS + 1% A-1170 (4:1)	None	4.5-5.0	6.3	<10%
5	4.2% VS + 0.8% A-1170 (5:1)	None	4.5-5.0	3.3	<10%
6	4.3% VS + 0.7% A-1170 (6:1)	None	4.5-5.0	2.5	<10%
7	4.4% VS + 0.6% A-1170 (7:1)	None	4.5-5.0	2.1	<5%

Example	Silane(s)	Solvent (in addition to water)	pH of treatment solution	White rust coverage after 14 day stack test	White rust coverage after 24 hour salt spray test
8	4.44% VS + 0.56% A-1170 (8:1)	None	4.5-5.0	1.7	<5%
9	4.5% VS + 0.5% A-1170 (9:1)	None	4.5-5.0	0.8	<5%

VS = vinyltrimethoxysilane

MS = methyltrimethoxysilane

BTSE = 1,2-bis-(triethoxysilyl) ethane

A-1170 = bis-(trimethoxysilylpropyl) amine

Solution stability was monitored by visual observation. Any turbidity or gelling of the solution is an indication that the silanes are condensing, and therefore the effectiveness of the silane solution is degraded. The silane solution comprising 5% VS (as described in Table 1 above) exhibited gelling within three days after solution preparation. In contrast, the solution comprising 4% VS and 1% A-1170 exhibited no gelling or turbidity two weeks after the solution had been prepared, thereby indicating that the addition of the bis-silyl aminosilane significantly improved solution stability while also improving corrosion protection. While higher ratios of vinyl silane to bis-silyl aminosilane further improve corrosion protection, applicants have found that improvements in solution stability are diminished. Thus, for example, the improved solution stability allows the silane solutions of the present invention to be used several days (or even longer) after the solution is first prepared.

The foregoing description of preferred embodiments is by no means exhaustive of the variations in the present invention that are possible, and has been presented only for purposes of illustration and description. Numerous modifications and variations will be apparent to those skilled in the art in light of the teachings of the foregoing description without departing from the scope of this invention. For example, various types of polymer coatings other than paint may be applied on top of the silane coating of the present invention. In addition,

vinyltrimethoxysilane and bis-(trimethoxysilylpropyl) amine are merely exemplary silanes which may be employed. Thus, it is intended that the scope of the present invention be defined by the claims appended hereto.

1. A method of treating a metal surface, comprising the steps of:

- (a) providing a metal surface; and

(b) applying a silane solution to said metal surface, said silane solution having at least one vinyl silane and at least one bis-silyl aminosilane, wherein said at least one vinyl silane and said at least one bis-silyl aminosilane have been at least partially hydrolyzed.


2. A method according to claim 1, wherein the metal surface selected from the group consisting of steel, aluminium, aluminium alloys, zinc, zinc alloys, magnesium, magnesium alloys, copper, copper alloys, tin, and, tin alloys.

3. A method according to claim 1, wherein the metal surface is selected from the group consisting of: ~

- a metal surface having a zinc-containing coating;
- zinc; and
- zinc alloy.

4. The method of any preceding claim, wherein said vinyl silane has a trisubstituted silyl group, and wherein the substituents are individually selected from the group consisting of hydroxy, alkoxy, aryloxy and acyloxy.

5. The method of any preceding claim, wherein said vinyl silane comprises:

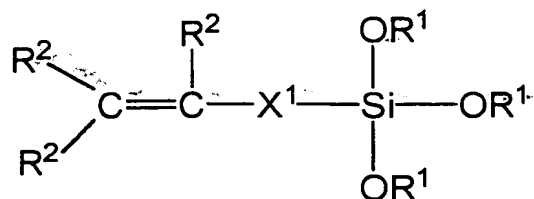



wherein:

-each  $R^1$  is individually selected from the group consisting of: hydrogen,  $C_1 - C_{24}$  alkyl and  $C_2 - C_{24}$  acyl;

- $X^1$  is selected from the group consisting of: a C-Si bond, substituted aliphatic groups, unsubstituted aliphatic groups, substituted aromatic groups, and unsubstituted aromatic groups; and

-each  $R^2$  is individually selected from the group consisting of: hydrogen,  $C_1 - C_6$  alkyl,  $C_1 - C_6$  alkyl substituted with at least one amino group,  $C_1 - C_6$  alkenyl,  $C_1 - C_6$  alkenyl substituted with at least one amino group, arylene, and alkylarylene.


6. The method of claim 5, wherein each  $R^1$  is individually selected from the group consisting of: hydrogen, ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl.

7. The method of claim 5 or 6, wherein  $X^1$  is selected from the group consisting of: a C-Si bond,  $C_1 - C_6$  alkylene,  $C_1 - C_6$  alkenylene,  $C_1 - C_6$  alkylene substituted with at least one amino group,  $C_1 - C_6$  alkenylene substituted with at least one amino group, arylene, and alkylarylene.

8. The method of claim 5, 6 or 7, wherein each  $R^2$  is individually selected from the group consisting of: hydrogen, ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl.

9. The method of any preceding claim, wherein said bis-silyl aminosilane comprises an aminosilane having two trisubstituted silyl groups, wherein the substituents are individually selected from the group consisting of hydroxy, alkoxy, aryloxy and acyloxy.

10. The method of any preceding claim, wherein said bis-silyl aminosilane comprises:

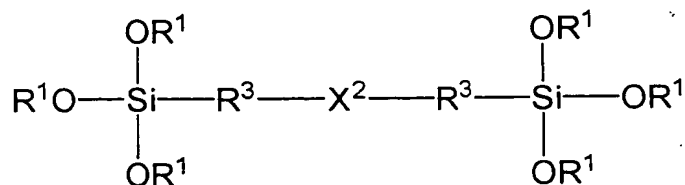

wherein:

- 5      -each  $\text{R}^1$  is individually selected from the group consisting of: hydrogen,  $\text{C}_1 - \text{C}_{24}$  alkyl and  $\text{C}_2 - \text{C}_{24}$  acyl;
- each  $\text{R}^3$  is individually selected from the group consisting of: substituted aliphatic groups, unsubstituted aliphatic groups, substituted aromatic groups, and unsubstituted aromatic groups; and
- $\text{X}^2$  is either:



- 10      -wherein each  $\text{R}^4$  is individually selected from the group consisting of: hydrogen, substituted and unsubstituted aliphatic groups, and substituted and unsubstituted aromatic groups; and
- $\text{R}^5$  is selected from the group consisting of: substituted and unsubstituted aliphatic groups, and substituted and unsubstituted aromatic groups.

11.      The method of claim 10, wherein each  $\text{R}^1$  is individually selected from the group consisting of: hydrogen, ethyl, methyl, propyl, iso-propyl, butyl, iso-butyl, sec-butyl, ter-butyl and acetyl.

12.      The method of claim 10 or 11, wherein each  $\text{R}^3$  is individually selected from the group consisting of:  $\text{C}_1 - \text{C}_{10}$  alkylene,  $\text{C}_1 - \text{C}_{10}$  alkenylene, arylene, and alkylarylene.

13. The method of claim 10, 11 or 12, wherein each  $R^4$  is individually selected from the group consisting of: hydrogen,  $C_1 - C_6$  alkyl and  $C_1 - C_6$  alkenyl.

14. The method of any of claims 10 to 13, wherein  $R^5$  is selected from the group consisting of:  $C_1 - C_{10}$  alkylene,  $C_1 - C_{10}$  alkenylene, arylene, and alkylarylene.

15. The method of any preceding claim, wherein said bis-silyl aminosilane is selected from the group consisting of: *bis*-(trimethoxysilylpropyl)amine, *bis*-(triethoxysilylpropyl)amine, and *bis*-(triethoxysilylpropyl)ethylene diamine.

16. The method of any preceding claim, wherein said vinyl silane is selected from the group consisting of: vinyltrimethoxysilane, vinyltriethoxysilane, vinyltripropoxysilane, vinyltriisopropoxysilane, vinyltributoxysilane, vinyltriisobutoxysilane, vinylacetoxysilane, vinyltriisobutoxysilane, vinylbutyltrimethoxysilane, vinylmethyltrimethoxysilane, vinylallyltrimethoxysilane, vinylpropyltrimethoxysilane, vinylbutyltriethoxysilane, and vinylpropyltriethoxysilane.

17. The method of any preceding claim, wherein the ratio (by volume) of the total concentration of vinyl silanes to the total concentration of bis-silyl aminosilanes in said silane solution is at least about 1.

18. The method of any preceding claim, further comprising the steps of drying said metal surface after said silane solution has been applied thereto, and thereafter coating said metal surface with a polymer selected from the group consisting of: paints, adhesives and rubbers.

19. The method of any preceding claim, wherein said metal surface is selected from hot-dipped galvanized steel, zinc sheet, aluminium sheet or steel

sheet.

20. The method of any preceding claim, wherein combinations of vinyl silane and bis-silyl aminosilane are selected from the group consisting of vinyltriacetoxysilane and bis-(trimethoxysilylpropyl)amine; vinyltriacetoxysilane and bis-(triethoxysilylpropyl)amine; vinyltrimethoxysilane and bis-(triethoxysilylpropyl)amine; vinyltriethoxysilane and bis-(triethoxysilylpropyl)amine; vinyltrimethoxysilane and bis-(trimethoxysilylpropyl)amine; and vinyltriethoxysilane and bis-(trimethoxysilylpropyl)amine.

21. A composition comprising at least one vinyl silane and at least one bis-silyl aminosilane.

22. An aqueous solution composition comprising at least one vinyl silane and at least one bis-silyl aminosilane, wherein said at least one vinyl silane and said at least one bis-silyl aminosilane are at least partially hydrolyzed.

23. The composition according to claim 21 or 22, comprising a vinylsilane as defined in any of claims 4 to 8 and 16, and a bis-silylamino silane as defined in any of claims 9 to 15.

24. The composition according to any of claims 21 to 23, wherein the ratio (by volume) of the total concentration of vinyl silanes to the total concentration of bis-silyl aminosilanes in said silane solution is at least about 1, preferably at least about 4.

25. The composition according to claim 22, wherein the total concentration of bis-silyl aminosilanes in said solution is between about 0.1% and about 5%, and wherein the total concentration of vinyl silanes in said solution is at least about 1%.

aminosilanes in said solution is between about 0.75% and about 3%, and wherein the total concentration of vinyl silanes in said solution is at least about 3%.

27. The composition according to any of claims 21 to 26, wherein combinations of vinyl silane and bis-silyl aminosilane are selected from the group consisting of vinyltriacetoxysilane and bis-(trimethoxysilylpropyl)amine; vinyltriacetoxysilane and bis-(triethoxysilylpropyl)amine; vinyltrimethoxysilane and bis-(triethoxysilylpropyl)amine; vinyltriethoxysilane and bis-(triethoxysilylpropyl)amine; vinyltrimethoxysilane and bis-(trimethoxysilylpropyl)amine; and vinyltriethoxysilane and bis-(trimethoxysilylpropyl)amine.

28. A silane coated metal surface, comprising:

- (a) a metal surface selected from the group consisting of: steel, aluminium, aluminium alloys, zinc, zinc alloys, magnesium, magnesium alloys, copper; copper alloys, tin, and, tin alloys.
- (b) a silane coating bonded to said metal surface, said coating comprising at least one vinyl silane and at least one bis-silyl aminosilane.

29. The metal surface of claim 28, wherein said metal surface is selected from hot-dipped galvanized steel, zinc sheet, steel sheet and aluminium sheet.

30. A silane coated metal surface made in accordance with the method of any of claims 1 to 20.

ABSTRACT

5 A method of treating a metal surface by application of a solution containing at least one vinyl silane and at least one bis-silyl aminosilane. A composition composition having at least one vinyl silane and at least one bis-silyl aminosilane is also provided, along with a silane coated metal surface.